

Series	LED	LED colors	Incan.	Dimming	Exterior	Interior	Feed-Thru	Other Options
121	•	•		•	•	•		Bronze faceplate Choice of diffuser Fastening choices

Steplites

L121 SERIES

Description

This ultra compact Steplite features high performance LEDs and a wide array of faceplate choices. It is appropriate in a variety of interior or exterior applications. The rugged construction, engineering excellence, and quality make this fixture ideal for specification in most public areas.

Features

Stainless steel housing construction ensures maximum exterior durability. Satin finish and frosted tempered glass diffuser provides a sleek modern appearance. Integral driver simplifies specification and installation.

Applications

The 121 Series Steplites are suitable for concrete pour/block wall and stud wall mounting in indoor or outdoor installations. They are ideal in low walls and stairways for general illumination, and for use as marker lights.

Custom


If your project demands a special fixture we would be pleased to discuss the production of modified standard fixtures or custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



L121SW-N-OPL - Opal diffuser



L121SW-AL-2H-LVR-WHT - Louver in white

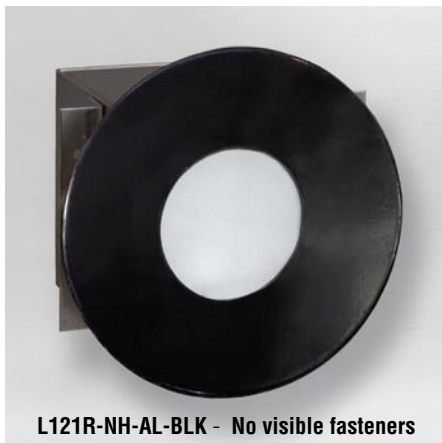

L121R-NH-AL-BLK - No visible fasteners



L121RW-B-OPL - Bronze faceplate



L121RW-AL-LVR
Aluminum

L121RW-N-LVR
Stainless Steel



L121S-NH-B-LVR
Optional solid bronze
louvered faceplate with
no visible fasteners



L121SW-AL
Standard fixture with metallic silver
powder-coated aluminum faceplate





High performance
LEDs are standard
with this fixture





C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

LED square

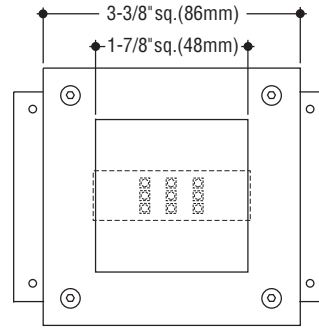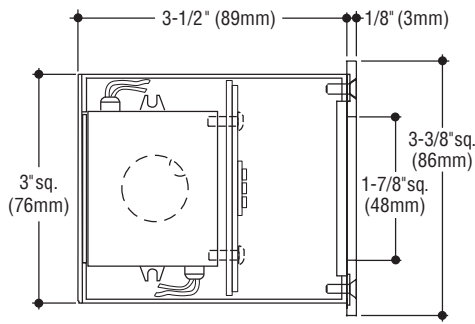

LED round

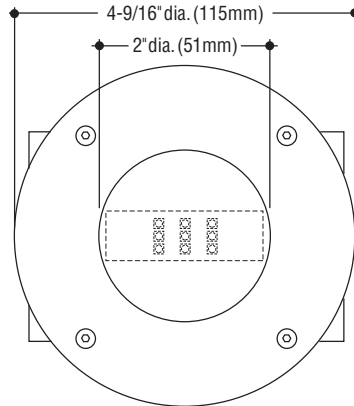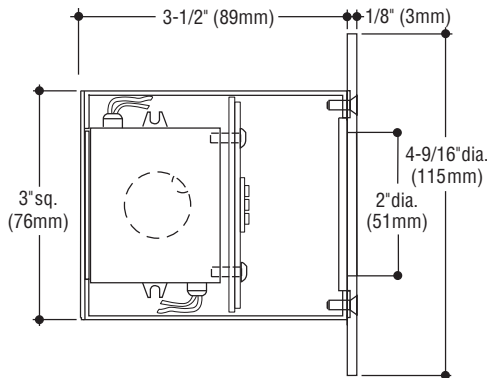

Steplites

L121 SERIES

SPECIFICATIONS

Construction

- Housing is 16 gauge stainless steel suitable for concrete pour installations
- Faceplates are 1/8" metallic silver powder-coated aluminum or satin finished stainless steel, passivated for maximum rust resistance
- Wet location fixtures are furnished with stainless steel socket head tamperproof screws; fastenerless faceplates available for damp or dry locations
- Diffuser is frosted or opal tempered glass set in silicone sealant
- cETLus listed for installation in wet locations.

Electrical

- High performance LEDs are available in a variety of colors
- Integral universal voltage driver is standard; 120V ELV dimming driver optional
- Housing provided with two 1/2" conduit knockouts.

Mounting

Housing has flanges with holes for mounting.

Catalog Number Lamp	Square Faceplate		Round Faceplate	
	Aluminum	Stainless Steel	Aluminum	Stainless Steel
LED 3.15W, (450 lm @ 3000°K)	L121SW-AL	L121SW-N	L121RW-AL	L121RW-N

Lumens shown are source.

Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Options

LED colors:

4000°K (470 lm). Add suffix **-4K**,

Blue. Add suffix **-BLU**,

Amber. Add suffix **-AMB**,

590nm Amber (FWC compliant).

Add suffix **-AMB/590**

Voltage: 277V driver, universal voltage.

Add suffix **-277**.

Dimming: ELV dimming driver (120V only).

Add suffix **-DIM**

Opal glass diffuser: Tempered. Add suffix **-OPL**.

Louvered faceplate: 3/16" thick, narrow louvered faceplate. Add suffix **-LVR**.

Bronze faceplate: Solid bronze satin finish, clear coated. Add suffix **-B**.

Alternate faceplate color: ("AL" only):

White. Add suffix **-WHT**,

Black. Add suffix **-BLK**,

Custom color (consult factory for choices).

Add suffix **-CC**.

Two hole: Faceplate with two fasteners.

Add suffix **-2H**.

No hole: No visible fasteners (damp or dry locations only). Substitute **-NH** for W.

How to Specify

1. Select catalog number.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com