


Installation Instruction Sheet

KWL-612, SKWL-614 (BACK), KBL-612, SKBL-614 (END), KCL-612, SKCL-614 (CEILING) & KML-612, SKML-614 (MULLION) SINGLE FACE KCLD-612, SKCLD-614 (CEILING) & KBLD-612, SKBLD-614 (END) DOUBLE FACE TRADITIONAL EDGELIGHTED SERIES

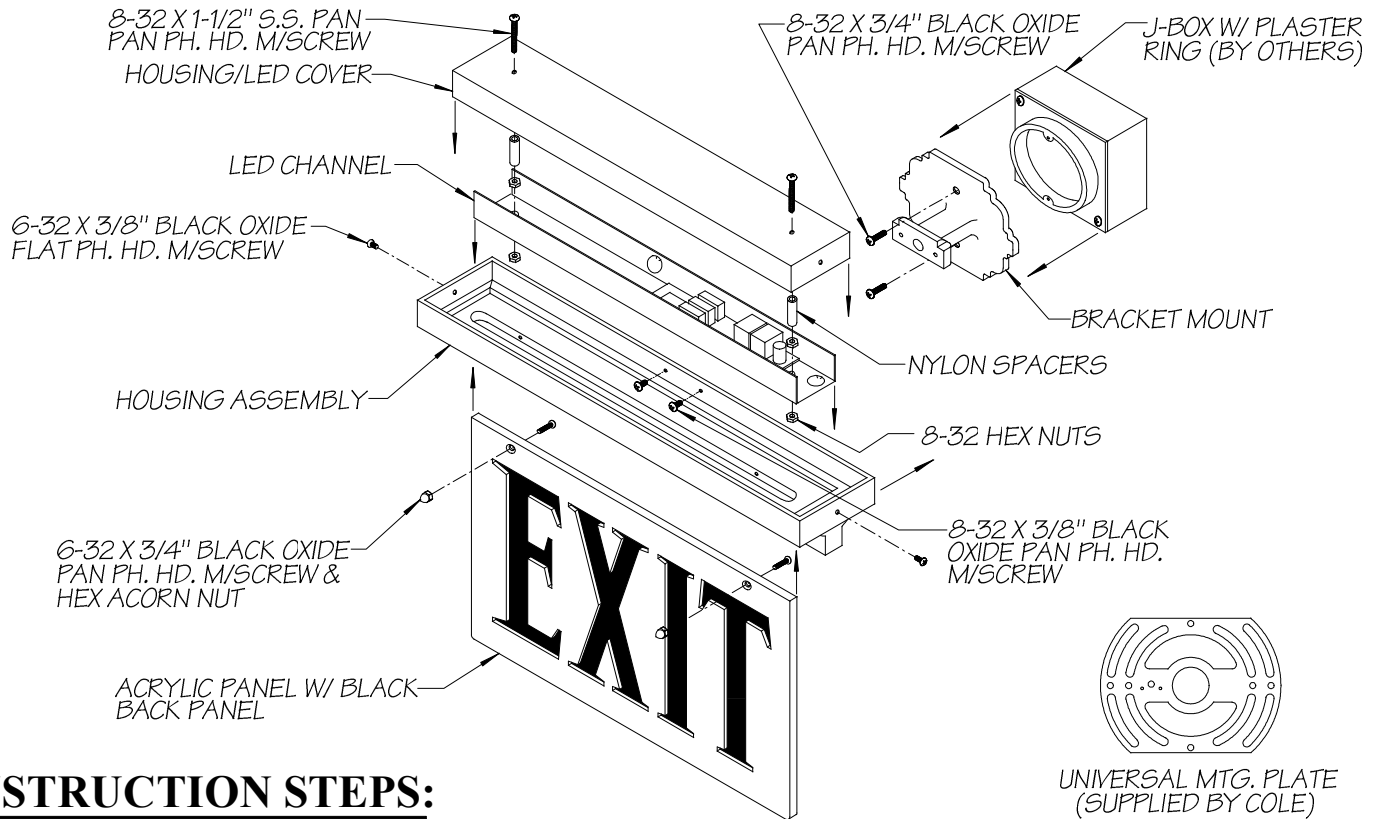

INSTRUCTION STEPS:

- 1.) Turn off electrical power supplied to fixture.
- 2.) Use provided (2) 8-32 X 3/8" black oxide flat head phillips m/screw to attach (from inside housing) bracket mount to housing assembly (back mounting bracket shown).
- 3.) Make wire connections from led assembly through bracket mount and into j-box (j-box by others).
- 4.) Use provided (2) 6-32 X 3/8" black oxide flat phillips head m/screw to attach led channel assembly into housing assembly.
- 5.) Mount assembled fixture to wall (or ceiling) & j-box with plaster ring (if not using plaster ring, use univ. mtg. plate supplied by Cole) using provided (2) 8-32 X 3/4" black oxide pan phillips head m/screw (j-box w/ plaster ring by others).
- 6.) Attach acrylic panel with black back panel into bottom opening of housing assembly with provided (2) 6-32 X 3/4" black oxide pan phillips head m/screw & hex acorn nuts.

NOTE:

***THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**

***CONTACT WITH ACID-WASH OF ANY TYPE TO ANY SURFACE OF FIXTURE WILL/MAY VOID WARRANTY.**