

Series	LED	Color LED	Incan.	Dimming	Exterior	Interior	Feed-Thru	Other Options
L141	●	●		●	●	●		Faceplate color Tamperproof screws

Steplites

L141 SERIES

Description

This compact Steplite features full cutoff, completely eliminating any glare and brightness. Its heavy duty die-cast faceplate is perfectly suited for illuminating aisles in theaters, lecture halls, and auditoriums.

Construction

- Housing is 16 gauge electro-galvanized steel, suitable for use in concrete pour installations
- Cast aluminum hooded faceplate, finished in black polyester, is retained by stainless steel screws
- Frosted acrylic diffuser helps prevent LED imaging
- cETLus listed for use in wet locations, when specified, in any wall construction.

Electrical

- High performance LEDs are available in a variety of colors
- Integral universal voltage driver is standard; 120V ELV dimming driver optional
- 0-10V remote dimming driver available upon request
- Housing provided with two 1/2" conduit knockouts.

Mounting

Housing has flange with holes for mounting.

Custom

If your project demands a special fixture we would be pleased to discuss the production of modified standard fixtures or custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.

How to Specify



1. Select catalog number.
2. Add suffixes for options required to meet job conditions.



L141-TP



Perfectly suited for use in theaters, lecture halls, and auditoriums.

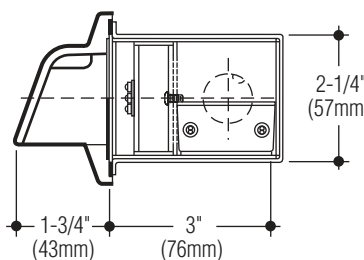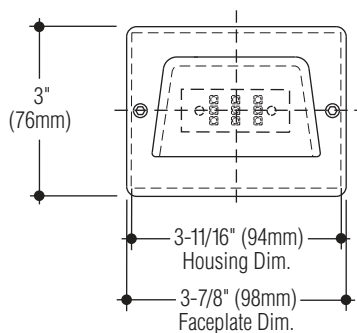

Catalog Number

Lamp

LED 3.15W, (450 lm @ 3000°K)

L141

Lumens shown are source.

Photometric data available for L141 can be downloaded at: <https://www.colelighting.com/photometrics>

Options

Tamperproof screws: Socket head faceplate screws. Add suffix **-TP**.

Weatherproof: For exterior applications. Add suffix **-W**

Alternate faceplate color:

Metallic aluminum, white or custom color. Add suffix **-ALU**, **-WHT** or **-CC**

Dimming:

120V only. Add suffix **-DIM/ELV**
0-10V remote driver. Add suffix **-DIM/0-10V**

LED colors:

4000°K (470 lm). Add suffix **-4K**.
Amber. Add suffix **-AMB**,
Blue. Add suffix **-BLU**.

COLE
Lighting

C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com