

Series	LED	E26/med. based lamp	Surface	Dimming	Exterior	Interior	Feed-Thru	Other Options
150	●	●	● Available on L150H	●	●	●	● Not available on L150H	Faceplate colors Tamperproof screws Diffuser colors

## Steplites

### 150 SERIES

#### Description

The 150 Series of Steplites is a variety of models suitable for various interior uses where the level of light output is not a significant requirement. The fixtures utilize low wattage, long-life LEDs and integral drivers

#### Features

The formed steel construction allows for finish options. Some fixtures feature integral feed-thru capability. The L150G models are available with a selection of diffuser colors.

#### Applications

The L150H and L150E models are most suitable as nitelites and aisle lights where low-glare/low-light level is desired. Applications include auditoriums, lecture halls and theater aisles. The 150G models may be used as indicator or warning lights for laboratories, X-ray rooms, recording studios, etc. The 150G/PA-BLU models meet the requirements of Pennsylvania for indicator lights at fire extinguisher locations.

#### Custom

If your project demands a special fixture we would be pleased to discuss the production of modified standard fixtures or custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



L150H-N

The L150H provides subtle illumination for nitelite use.



L150E

The L150E is an unobtrusive aisle light.



L150G/PAS-RED

The 150G/PA can be used as an indicator or warning light.



L150G/PAR-BLU

The 150G/PA-BLU models meet Pennsylvania code for fire extinguisher indicator lights.



SL150H - Surface

SL150H-WHT







L150H - Interior

High performance LEDs are standard with this fixture



C.W. Cole & Company, Inc.  
2560 Rosemead Boulevard  
South El Monte, CA 91733-1593

Tel. (626) 443-2473  
Fax (626) 443-9253  
info@colelighting.com  
[www.colelighting.com](http://www.colelighting.com)

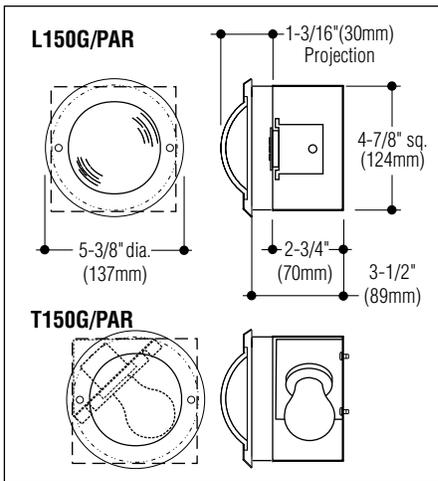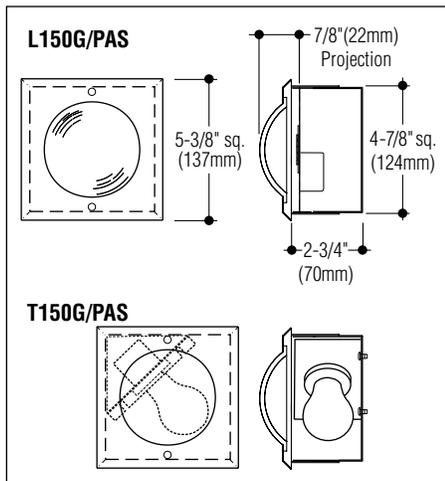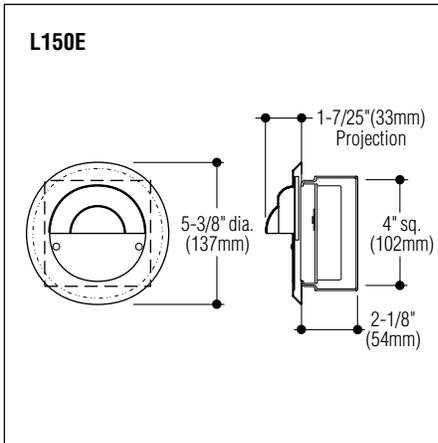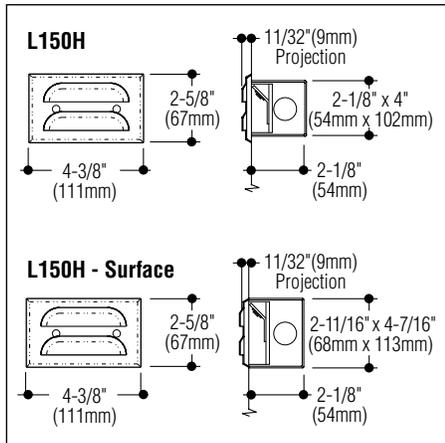

## Catalog Numbers

Lamp	Faceplate	
LED .75W, (63 lm @ 3000°K)	Rectangular with louver, clear/frosted diffuser	<b>L150H</b>
LED .75W, (63 lm @ 3000°K)	Rectangular with louver, clear/frosted diffuser	<b>SL150H**</b>
LED 3.15W, (450 lm @ 3000°K)	Rectangular with louver, clear/frosted diffuser	<b>L150H-HO</b>
LED 3.15W, (450 lm @ 3000°K)	Rectangular with louver, clear/frosted diffuser	<b>SL150H-HO**</b>
LED 3.15W, (450 lm @ 3000°K)	Round with "eyelid", clear/frosted diffuser	<b>L150E</b>
LED 3.15W, (450 lm @ 3000°K)	Square with round (choice of color) diffuser	<b>L150G/PAS-(diffuser)</b>
LED 3.15W, (450 lm @ 3000°K)	Round (choice of color) diffuser	<b>L150G/PAR-(diffuser)</b>
One E26/medium base lamp	Square with round (choice of color) diffuser	<b>T150G/PAS-(diffuser)</b>
One E26/medium base lamp	Round (choice of color) diffuser	<b>T150G/PAR-(diffuser)</b>

Lumens shown are source.

\*\* Surface fixture

Photometric data available for steplites can be downloaded at:

<https://www.colelighting.com/photometrics>

## Options

### LED colors:

4000°K (470 lm), 150H (.66 lm). Add suffix **-4K**.

Amber. Add suffix **-AMB\***,

Blue. Add suffix **-BLU**.

**Remote driver:** Remote driver(s) and enclosures.

Add suffix **-REM\***.

### Dimming:

Integral 120V only; uses 3.15W LED

Add suffix **-DIM/ELV\***

Remote 0-10V; requires (-REM) remote driver

Add suffix **-DIM/0-10V\***

**Tamperproof screws:** Socket head faceplate screws. Add suffix **-TP**

**Flasher:** Add suffix **-FL**.

**Voltage:** 277V driver, universal voltage.

Add suffix **-277\***

**Stainless steel faceplate:** (except L150E)

Add suffix **-N**.

**Alternate faceplate color:** Black, White or metallic aluminum. Add suffix **-BLK**, **-WHT** or **-ALU**.

**Antimicrobial white paint:** Resist microbial growth. Add suffix **-AM**

**Diffuser color:** White, red, blue, and green (150G only). Add suffix **-WHT**, **-RED**, **-BLU** or **-GRN**.

\* Not available on any E26 med. base fixtures

## Steplites

### 150 SERIES

#### SPECIFICATIONS

#### Construction

- Faceplate is die-formed 20 gauge steel with white polyester coating, retained by stainless steel pan-head screws
- L150H and L150E utilize standard electrical junction boxes as housings
- 150G and 150G/PA have 18 gauge electro-galvanized steel housing with white polyester coating
- SL150H has 18 gauge electro-galvanized steel housing with black polyester coating
- Faceplate is gasketed for light leak
- L150E and L150H diffuser is clear/frosted acrylic
- Reflector is constructed of white die-formed aluminum
- cETLus listed, suitable for installation in any wall construction fixture
- Suitable for damp locations.

#### Electrical

- Fixture is wired for either LED modules or one E26/medium base socket for 150G/PA models
- Integral universal voltage driver is standard; 0-10V remote dimming driver optional
- Fixtures featuring thru-wire capability: 2 wires in, 2 wires out. Housing provided with 1/2" conduit on each side
- 150G/PA models with blue diffuser meet Pennsylvania fire extinguisher code 50.71

#### Mounting

Housing has holes for mounting.

#### How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

**COLE**  
*Lighting*

**C.W. Cole & Company, Inc.**  
2560 Rosemead Boulevard  
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

[www.colelighting.com](http://www.colelighting.com)