

Series	LED	Color LEDs	Surface collar	Dimming	Exterior	Interior	EM Battery	Other Options
L2600	•	•	•	•	•	•	•	Choice of diffusers and finishes

Steplites

FannyPack XL

L2600 SERIES

Description

The L2600 FannyPack XL Series Steplite is a heavy-duty, high-performance, low-level surface wall mounted fixture for illuminating walkways and walls. The design offers the capability for uplighting, downlighting, or both.

Features

The ADA-compliant dimensions and smooth design make the FannyPack XL a unique choice for walkway illumination, with the added capability for uplighting. The rugged cast aluminum construction ensures long service in most public areas.

Applications

The FannyPack XL is suitable for walkway lighting along corridors, at the sides of stairs, or at columns, where the uplighting can highlight the architecture.

Custom

If your project demands a special fixture we would be pleased to discuss the production of custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



2600W-2-ST/ST

Multiple diffuser choices available.



L2600W-1-SC-FG with surface collar



COLE
Lighting

C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

Steplites

FannyPack XL

L2600 SERIES

SPECIFICATIONS

Construction


- ADA-compliant housing is cast aluminum with a 16 gauge stainless steel back mounting plate. Optional surface collar is .063" aluminum
- Finish is textured black polyester. Other finishes are available
- Trim is fastened in place by stainless steel mounting screws
- Fixture offers choices of frosted, ribbed spread, and prismatic lenses, each set in silicone sealant. Illumination can be directed up, down, or both
- cETLus listed for use in wet locations on any wall construction.

Electrical

- Standard and high output LEDs are available in a variety of colors
- Integral drivers is standard universal voltage; optional 0-10V dimming driver available.

Mounting

- Stainless steel wall plate and surface collar includes universal mounting pattern with center feed entry.

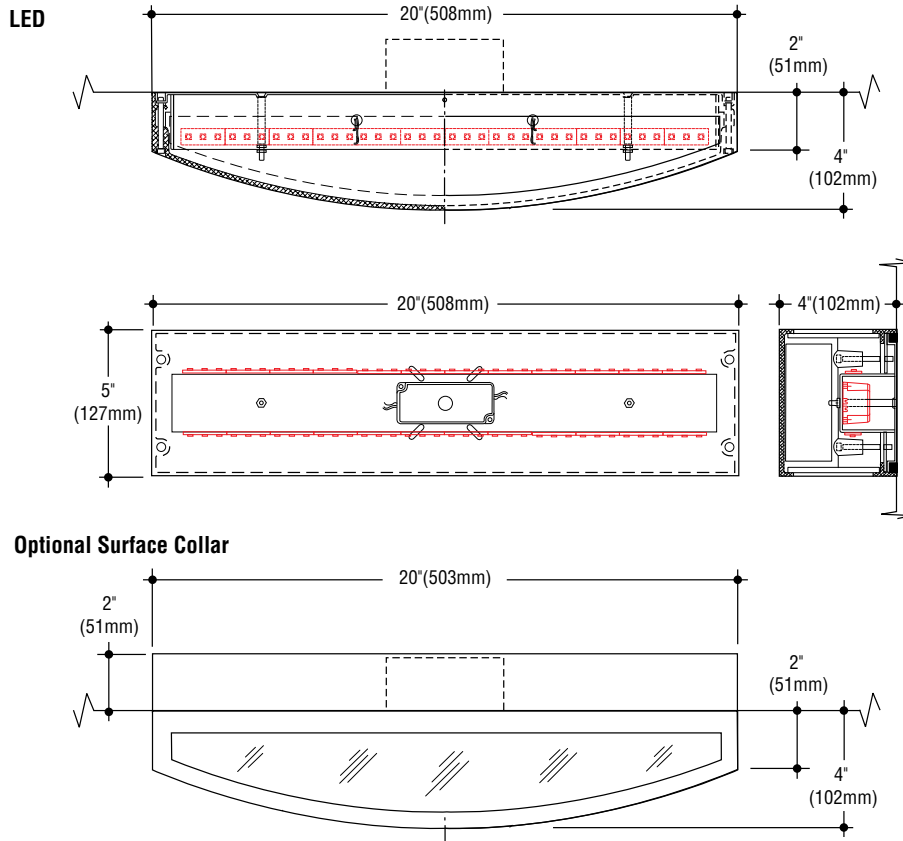

Catalog Number

Lamp	One diffuser	Two diffusers
LED 9.0W, 755 lm @ 3000°K per diffuser	L2600W-1-(diffuser)	L2600W-2-(top diffuser/bottom diffuser)
LED 18.6W, 1985lm @ 3000°K per diffuser	L2600W-1-HO-(diffuser)	L2600W-2-HO (top diffuser/bottom diffuser)

Lumens shown are source. Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Options

Alternate finishes: Metallic aluminum or textured white. Add suffix **-ALU** or **-WHT**.

Diffusers: Select one or two diffuser choices. If same diffuser selected for two-diffuser models, state selection twice. (Example: L2600W-2-ST/ST) Add suffixes as required.

- Frosted tempered glass **-FG**
- Ribbed glass spread lens **-ST**
- Prismatic tempered glass **-C73**
- Perforated panel/glass **-PF**
- Opal glass diffuser **-OPL**

Surface collar: Allows surface emergency battery/driver location and/or surface conduit capability. Adds 2" (no longer complies with ADA) to overall fixture depth. Add suffix **-SC**.

Emergency battery: Provides 90 minutes operation.

Requires recessed housing (std.) or surface collar (Add **-SC**). Add suffix **-EM**

LED colors: 4000°K (876 lm, per diffuser), -HO (2304 lm, per diffuser). Add suffix **-4K**. Amber (FWC compliant, 560 nm). Add suffix **-AMB**. Blue. Add suffix **-BLU**.

Dimming: Universal voltage 0-10V driver. Add suffix **-DIM**.

How to Specify

1. Select catalog number.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
 2560 Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
 Fax (626) 443-9253
info@colelighting.com
www.colelighting.com