

Steplites

Series	LED	Fluor.	Incan.	Dimming	Exterior	Interior	Feed-Thru	Other Options
500	●			●	●	●	●	Lens options LED colors Bronze faceplate

L500 SERIES

Description

This ultra low profile Steplite features high performance LEDs. It is appropriate in a variety of interior or exterior applications. The rugged construction, engineering excellence, and quality make this fixture ideal for specification in most public areas.

Features

All stainless steel construction ensures maximum exterior durability. Satin finish faceplate and frosted tempered glass diffuser provide a sleek modern appearance and an elegant solution for low-level illumination. Integral driver simplifies specification and installation. Four sizes are available to meet most any specification.

Applications

The 500 Series Steplites are suitable for concrete pour/block wall and stud wall mounting in indoor or outdoor installations. They are ideal in low walls and step risers for general illumination, and for use as marker lights.

Custom

If your project demands a special fixture, we would be pleased to discuss the production of modified standard fixtures or custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



L503W



L506W



L509W



L512W


The L500 Series is available with amber or blue LEDs.




C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com


Steplites

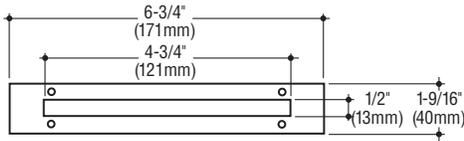


L503W

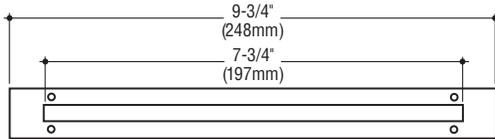


L506W

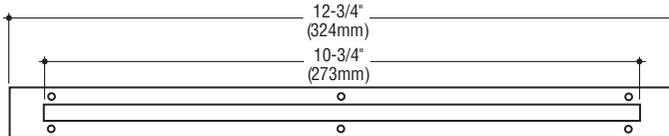

L509W

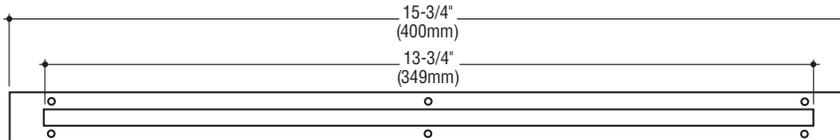

L512W



Housing widths:

L503W = 6-3/32" (155mm)

L506W = 9-3/32" (231mm)

L509W = 12-3/32" (307mm)

L512W = 15-3/32" (383mm)

L500 SERIES

SPECIFICATIONS

Construction

- Housing is 16 gauge stainless steel
- Faceplate is 3/16" satin finished stainless steel passivated for maximum rust resistance
- Fixtures are furnished with stainless steel socket head tamperproof screws
- Diffuser is frosted tempered glass set in silicone sealant
- cETLus listed for wet locations in any wall construction
- All models suitable for concrete pour.

Electrical

- Fixture is wired with high high output LEDs are available in a variety of colors
- Integral driver is standard universal voltage; optional 0-10v dimming driver available
- Housing provided with 1/2" conduit knockout on each side suitable for 4 wire thru-wiring, 2 in and 2 out.

Mounting

Housing has flange with holes for mounting.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

Catalog Number

Lamp

LED 1.5W, (126 lm @ 3000°K)

L503W

LED 3.0W, (252 lm @ 3000°K)

L506W

LED 4.5W, (377 lm @ 3000°K)

L509W

LED 6.0W, (503 lm @ 3000°K)

L512W

Lumens shown are source.

Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Options

Bronze faceplate: Satin finished, clear coated.

Add suffix **-B**.

Opal glass diffuser: Tempered. Add suffix **-OPL**.

Dimming: 0-10V dimming driver Universal Voltage.

Add suffix **-DIM**.

Emergency battery (4 Watt): Provides up to 90

minutes operation. Add suffix **-EM**.

LED colors:

4000°K (L503, 146 lm), (L506, 292 lm),

(L509, 438 lm), (L512, 584 lm). Add suffix **-4K**.

Amber (FWC compliant, 590 nm). Add suffix **-AMB**.

Blue Add suffix **-BLU**.



C.W. Cole & Company, Inc.
 2560 Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com