

Signs



SL193 — Back mount



SL294 — Ceiling mount

SL190/SL290 SERIES

Surface single compartment

The SL190/SL290 Series of signs offer clean styling in a popular size. The extruded aluminum housings feature a black polyester finish with copy on white snap-in panels. The wider SL190 Series is LED and available with an emergency battery backup system. The thinner SL290 Series offers a more sleek appearance. Either series may be specified for wet location installations. Many standard copy selections are available with custom options available upon request.



Custom color copy available as an option



SL191 — Recessed

SL191 SERIES


Recessed single compartment

The recessed SL191 Series of signs offer clean styling in a popular size. The extruded aluminum trim features a black polyester finish with copy on white snap-in panels. SL191 Series is LED and available with an emergency battery backup system. This Series may be specified for wet location installations. Many standard copy selections are available with custom options available upon request.



Illustrated with energized Read-Out Face option

SL252-ROF — Recessed

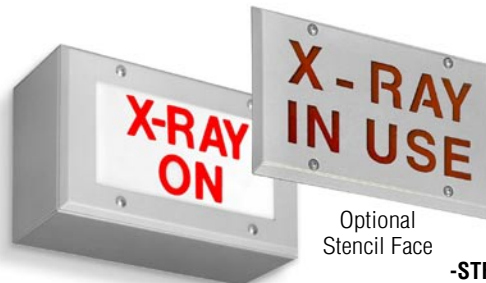

SL252S-E26 — Surface housing with LED lamp socket

Optional Stencil Face -STF

SL252 SERIES

Small recessed/surface single compartment

The compact SL252 Series of signs provide a less obtrusive presence where smaller copy is acceptable. Many standard copy selections are available with custom options available upon request. It is available with LED modules, or an E26 medium based lamp socket. Many standard copy options are in stock, and custom panels are available as required.




Read-Out Face option provides blank appearance unless sign is energized.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

Signs

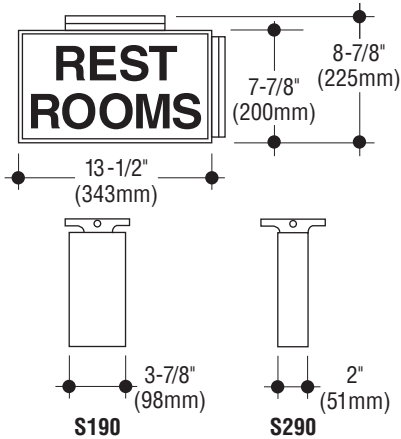

SPECIFICATIONS

Construction

- Fixture is constructed of extruded aluminum
- Finish is black polyester coating • Copy is silk-screened on white butyrate snap-in panel
- Bracket is die-cast aluminum with black finish
- cULus listed, for wet locations when specified.

Electrical

- SL190 & SL290 signs are wired with two LED modules, with universal voltage drivers.

Mounting

Sign mounts directly to junction box.

SL190/SL290 SERIES

Catalog Numbers

Back Mount	SL193-*	SL293-*
Ceiling Mount	SL194-*	SL294-*
End Mount	SL192-*	SL292-*
	* selected Group D copy	

Options

Double Face: Add suffix **-D**.

Voltage: 277V driver, universal voltage.

Add suffix **-277**.

Flasher: 120 input voltage only. Add suffix **-FL**.


Read-Out Face: Blank until lighted.

Add suffix **-ROF**.

Stencil Face: Add suffix **-STF**.

Weatherproof: Add suffix **-W**.

Custom: Copy or Color. Add suffix **-CC**.

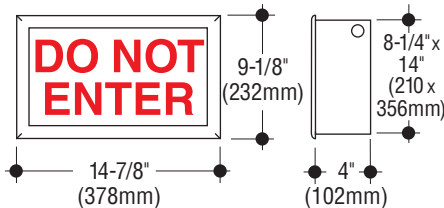

SPECIFICATIONS

Construction

- Fixture is constructed of 20 gauge steel, with an extruded aluminum trim • Finish on trim is black polyester coating; housing is white polyester coating • Copy is silk-screened on white butyrate snap-in panel • cULus listed, suitable for wet locations when specified.

Electrical

- Two LED modules with universal voltage driver.

Mounting

Housing has holes for mounting.

SL191 SERIES

Catalog Numbers

Recessed Mount **SL191-** (selected Group D copy)

Options

Voltage: 277V driver, universal voltage.

Add suffix **-277**.

Flasher: 120 input voltage only. Add suffix **-FL**.


Read-Out Face: Blank until lighted.

Add suffix **-ROF**.

Stencil Face: Add suffix **-STF**.

Weatherproof: Add suffix **-W**.

Custom: Copy or Color. Add suffix **-CC**.

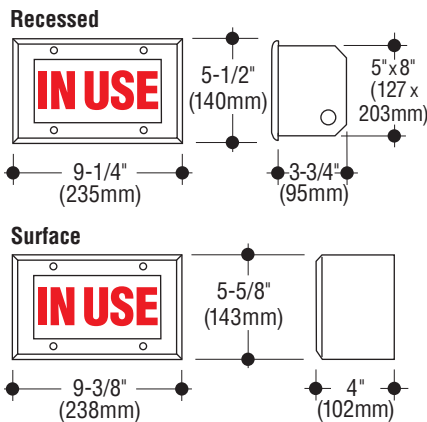

SPECIFICATIONS

Construction

- Fixture is constructed of 16 gauge steel recessed housing suitable for poured concrete construction • Trim and surface housing finish is metallic aluminum polyester coating; recessed housing is white polyester coating • Copy is silk-screened on white acrylic • cULus listed, suitable for wet locations when specified.

Electrical

- One LED module with universal voltage driver.
- Wired for one E26 med. based lamp optional.

Mounting

Recessed housing has flanges with holes for mounting, suitable for any wall construction. Surface sign mounts to junction box.

SL252 SERIES

Catalog Numbers

Recessed Mount **SL252-** (selected Group E copy)

Surface Mount **SL252S-** (selected Group E copy)

Options

E26 socket: Med. based for LED bulb.

Add suffix **-E26**.

Ceiling Mount: Add suffix **-C** to SL252S.

Voltage: 277V driver, universal voltage.

Add suffix **-277**.

Read-Out Face: Blank until lighted.

Add suffix **-ROF**.

Stainless Steel: Satin finished. Add suffix **-N**.

Stencil Face: Add suffix **-STF**.

Weatherproof: Add suffix **-W**.

Flasher: 120 input voltage only. Add suffix **-FL**.

Custom: Copy or Color. Add suffix **-CC**.

Standard Copy Options

Group D

X-RAY ROOM IN OPERATION DO NOT ENTER	IN USE	AREA OF RESCUE ASSISTANCE	DO NOT ENTER
X-RAY ON	X-RAY IN USE	BEAM ON	ON THE AIR
LASER IN USE	DARKROOM IN USE	ROOM IN USE	FIRE ESCAPE
MEN	WOMEN	STAIRS	REST ROOMS
ATM	ELEVATORS		

Group E

DARKROOM IN USE	DO NOT ENTER
X-RAY ON	X-RAY IN USE
LASER IN USE	IN USE
ON AIR	ATM
<i>This chart indicates standard colors</i>	



C.W. Cole & Company, Inc.
 2560 Rosemead Boulevard
 South El Monte, CA 91733-1593
 Tel. (626) 443-2473 • Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com