

JOB NAME _____

Type _____

CATALOG NUMBER _____

Steplites

L2158 SERIES

SPECIFICATIONS

Construction


- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with metallic aluminum polyester coating or 3/16" stainless steel with brushed finish
- Each trim is gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass set in silicone sealant
- Reflector is constructed of white die-formed aluminum
- Optional junction box is cast aluminum with polyester coating
- cETLus listed, suitable for wet locations in any wall construction.

Electrical

- Fixture is wired with high performance LEDs and available in a variety of colors. Integral driver is standard universal voltage; optional 0-10V dimming driver available
- Housing provided with 1/2" conduit knockout on each side, suitable for 4 wire thru-wiring, 2 in 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flange with holes for mounting.

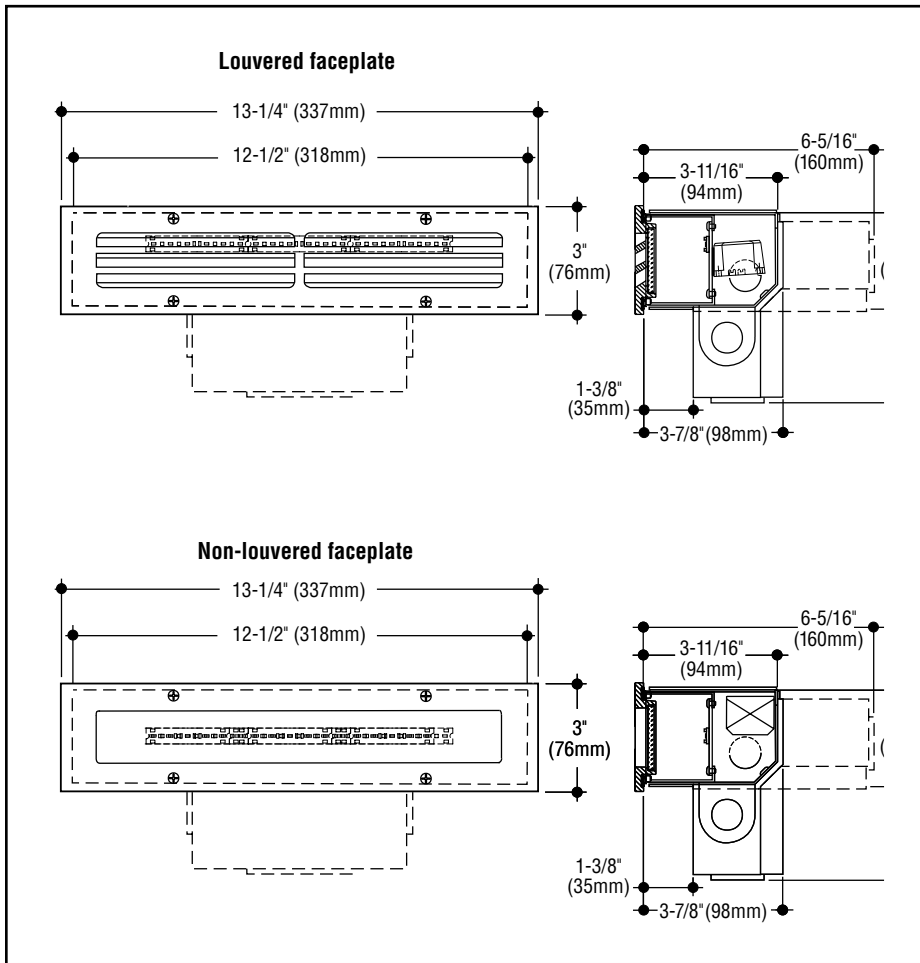

Catalog Numbers

Lamps

LED 4.5W, (377 lm @ 3000°K)

LED 10.8W, (645 lm @ 3000°K)

Lumens shown are source.

Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Faceplate

Alum. Louver

L2158W

L2158W-HO

Alum. Non-Louver

L2158GW

L2158GW-HO

S.S. Louver

L2158W-N

L2158W-N-HO

S.S. Non-Louver

L2158GW-N

L2158GW-N-HO

Options

Junction box: Bottom or back mounted as required for feed-thru. Add suffix -J.

Cast Bronze faceplate: Satin finished, clear coated faceplate. Add suffix -B

Tamperproof screws: Socket head faceplate screws. Add suffix -TP

Alternate faceplate color: Black, White or custom color. Add suffix -BLK, -WHT or -CC (Contact factory for custom preference).

Dimming: Universal voltage 0-10V driver. Add suffix -DIM.

Emergency battery (4 Watt): Provides up to 90 minutes operation. Add suffix -EM.

LED colors:

4000°K (438lm), -HO (1152lm).

Add suffix -4K.

Amber (FWC compliant, 590 nm).

Add suffix -AMB.

Blue Add suffix -BLU.

Opal glass diffuser: Tempered. Add suffix -OPL.

Voltage: 277V. Add suffix -277.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

C.W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com