

JOB NAME _____

Type _____


CATALOG NUMBER _____

Steplites

FannyPack

**L2500 SERIES
L2500-EGR SERIES**

LED _____

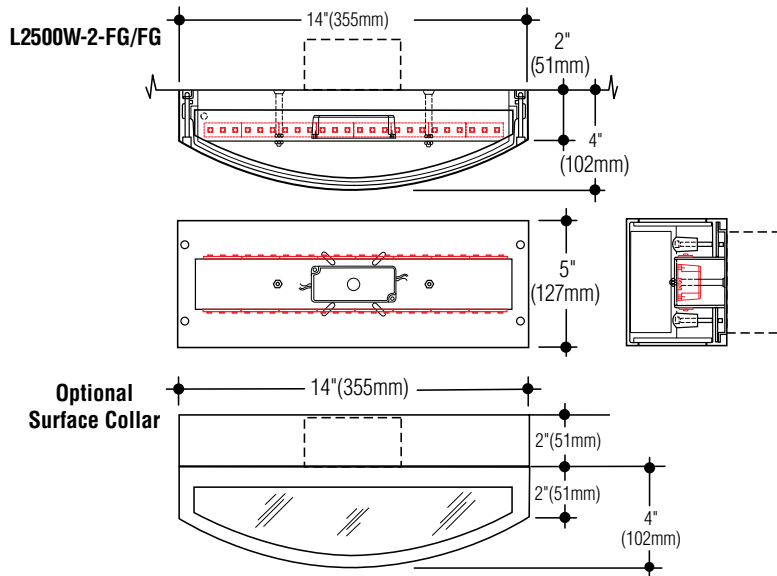


SPECIFICATIONS

Construction

- Housing is cast aluminum, mounted to a 16 gauge stainless steel back mounting plate or back housing. Optional surface collar is .063" aluminum
- Finish is textured black polyester. Other finishes are available
- Trim is fastened in place by stainless steel mounting screws
- Fixture is furnished with diffuser in either top, bottom, or both
- Diffuser is set in silicone
- ADA compliant
- cETLus listed
- LED models suitable for wet locations on any wall construction
- HID models suitable for wet locations in concrete pour/block wall construction.

LED-1-EGR (Egress) _____

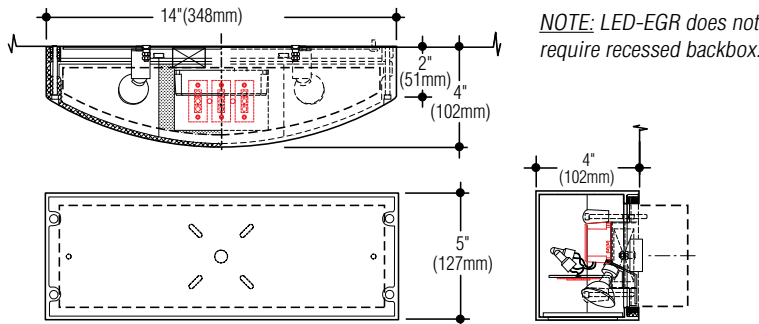

Electrical

- Wired for high performance LEDs
- Integral drivers are universal voltage; secondary MR11 lamps require 120V power supply
- Optional 0-10v dimming driver available
- Two 20W MR11 lamps are required with EGR option.

Mounting

- Slots on mounting plate allow mounting directly to junction box for LED models
- Recessed housing with emergency battery, have holes for mounting
- Fixture may be mounted with diffuser(s) in any position.

Catalog Number Lamp

- LED 6.0W, 503 lm @ 3000°K per diffuser
- LED 12.5W, 1323 lm @ 3000°K per diffuser
- LED 9.45W, (1350 lm @ 3000°K) and two 20MR11

One diffuser

- L2500W-1-(diffuser)
- L2500W-1-HO-(diffuser)
- L2500W-1-EGR

Two diffusers

- L2500W-2-(top diffuser/bottom diffuser)
- L2500W-2-HO-(top diffuser/bottom diffuser)

Lumens shown are source. Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Options

Alternate finishes: Metallic aluminum or textured white.

Add suffix -ALU or -WHT.

Diffusers: Select one or two diffuser choices. If same diffuser selected for two-diffuser models, state selection twice. (Example: L2500W-2-ST/ST)

Add suffixes as required.

Frosted tempered glass -FG. Ribbed glass spread lens -ST.

Perforated panel/glass -PF. Opal glass diffuser -OPL.

Prismatic tempered glass -C73.

Surface collar: Allows surface emergency battery driver location and/or surface conduit capability.

Adds 2" (no longer complies with ADA) to overall fixture depth. Add suffix -SC.

Emergency battery: Non-EGR LED models only. Provides 90 minutes operation. Requires recessed housing (std.) or surface collar (Add -SC). Add suffix -EM

LED colors:

4000°K (584 lm, per diffuser), -HO (1536 lm, per diffuser).

Add suffix -4K.

Amber* (FWC compliant, 560 nm). Add suffix -AMB.

Blue* Add suffix -BLU.

*Not available on EGR models.

Dimming: Universal voltage 0-10V driver. Add suffix -DIM.

How to Specify

1. Select catalog number.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com