

JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Exits

Interior/Exterior Applications

Aluminex
Aluminum Exit Signs

SPECIFICATIONS

Construction


• Sign is constructed from extruded aluminum • Recessed housing is 20 gauge steel • Bracket is die-cast aluminum • Surface housing, recessed sign trim, and bracket finish is semi-gloss black paint • Face is natural satin finish with clear anodize • Letters and arrows are stencil cut in faceplate, backed with .125" acrylic diffuser • Listed by ETL to UL 924 standard; meets NFPA Life Safety Code 101®.

Electrical

• Red or green LEDs are dual-circuit and universal voltage • When emergency battery operation is specified, all components are contained in housing. Nickel cadmium battery, test light and button are included with the -EM option.

Mounting

Surface signs mount to junction box. Recessed housing has holes for mounting

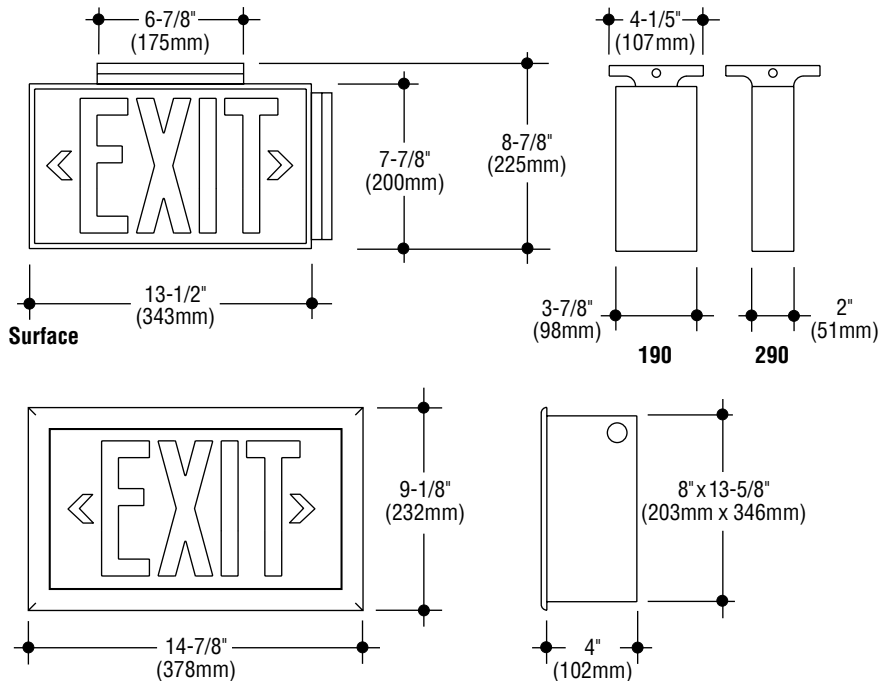

Recessed
Doublehead arrows shown. Arrows only furnished as specified.

Catalog Numbers	190 Series						290 Series					
	Single Face			Double Face			Single Face			Double Face		
Lamps	Back	Ceiling	End	Recessed	Ceiling	End	Back	Ceiling	End	Ceiling	End	
LED .4W, (Red), .3W (Green)	<input type="checkbox"/> L195	<input type="checkbox"/> L196	<input type="checkbox"/> L198	<input type="checkbox"/> L197	<input type="checkbox"/> LD196	<input type="checkbox"/> LD198	<input type="checkbox"/> L295	<input type="checkbox"/> L296	<input type="checkbox"/> L298	<input type="checkbox"/> LD296	<input type="checkbox"/> LD298	

Required suffixes

Letter color -RED -GRN
Voltage -120 -277

Options

Directional arrows:

- Arrow left -AL.
- Arrow right -AR.
- Doublehead -A2.
- Left and right (for double face) -A.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Emergency battery: Integral circuitry provides 90 minutes of operation. Add suffix -EM.

Pendant mount: Provides canopy and one 18" stem. Use ceiling model number and add suffix -S1.

Pedestal mount: Provides threaded flange on bottom for 1-1/4" pipe (190 series only).

Add suffix -PED.

Weatherproof: Add suffix -W.

Custom color: Contact factory for custom preference. Add suffix -CC.

Voltage: 277V driver, universal voltage.

Add suffix -277.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com