

JOB NAME _____

Type _____

CATALOG NUMBER _____

Steplites

**C1392 SERIES
Railite**

SPECIFICATIONS

Construction

- Fixture is constructed from either 20 gauge stainless steel or .050" aluminum
- Aluminum models are powder coated, while stainless steel models are satin finished, passivated for maximum rust resistance
- Faceplates are provided with 3/16" opal acrylic and are retained by stainless steel tamperproof screws
- cETLus listed for use in wet locations, in any wall construction.

Electrical


- Wired for standard and high performance LEDs
- Integral driver is standard universal voltage; optional 0-10v dimming driver available
- Remote drivers up to 60 watts can be specified to power multiple fixtures. Driver enclosures are available for damp, wet, and submersible applications
- Provided with 1/2" knockout on either side; other locations available upon request.

Mounting

Intended for mounting between pairs of vertical support posts via field-drilled mounting holes. Other mounting methods are available on request.

How to Specify

Select catalog number and add suffix(es) for desired options.

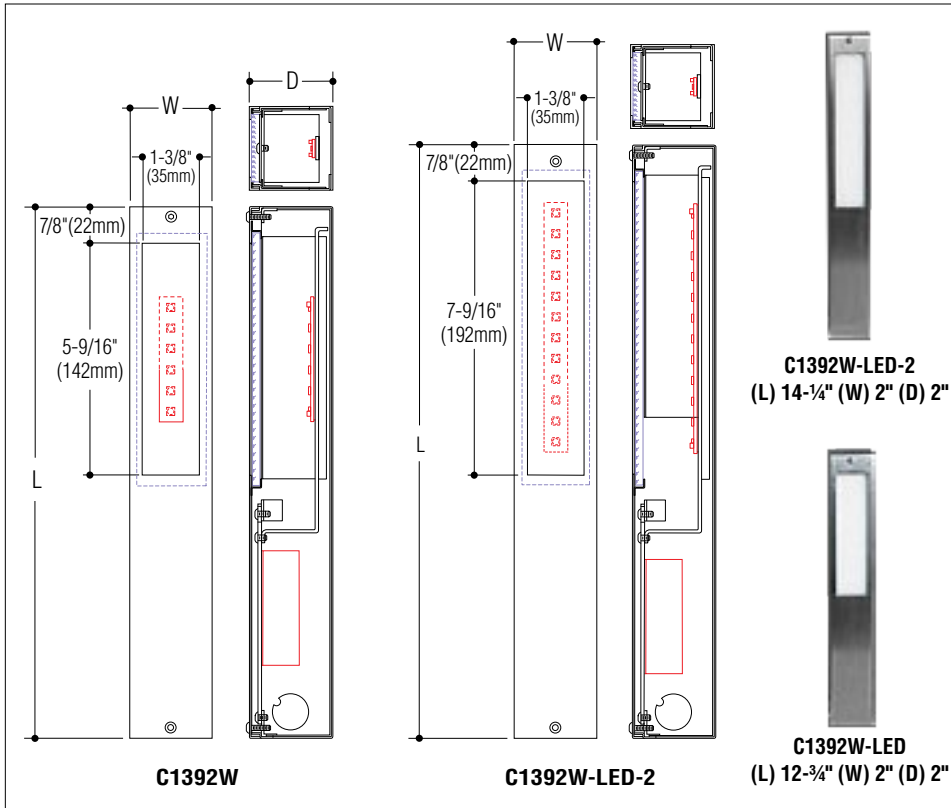

**C1392W-LED-2
(L) 14-1/4" (W) 2" (D) 2"**

**C1392W-LED
(L) 12-3/4" (W) 2" (D) 2"**

Catalog Number Lamp	Housing W & D	Housing Length	*OPTIONAL 1/2" KO'S AT BOTTOM
LED 1.5W, (126 lm @ 3000°K; 146 lm @ 4000°K) <input type="checkbox"/> C1392W-LED	2" x 2"	12 3/4"	1
LED 3.2W, (331 lm @ 3000°K; 346 lm @ 4000°K) <input type="checkbox"/> C1392W-LED-HO	2" x 2"	12 3/4"	1
LED 3.0W, (252 lm @ 3000°K; 292 lm @ 4000°K) <input type="checkbox"/> C1392W-LED-2	2" x 2"	14 1/4"	1
LED 6.4W, (662 lm @ 3000°K; 692 lm @ 4000°K) <input type="checkbox"/> C1392W-LED-HO-2	2" x 2"	14 1/4"	1

*Optional 1/2" KO's at bottom assumes standard locknuts and side by side spacing

Lumens shown are source. Photometric data available at: <https://www.colelighting.com/photometrics>

Options

Driver: 277V (Universal Voltage). Add suffix **-277**.

Alternate housing dimensions: Add suffix **-SP/** _____ (dimensions)

Alternate shielding: Contact factory for options. Add suffix **-OS**.

Remote Power Supply: Suitable for applications where line voltage can not be present.

Add suffix **-REM**

Dimming: 0-10V dimming driver (Universal Voltage). Add suffix **-DIM**.

Bottom knockout: 1/2" knockout at bottom in lieu of standard side knockouts (3" wide housing suitable for two knockouts). Add suffix **-BKO**

Back Access: Allows trim with no fasteners. Add suffix **-BA**.

LED colors: 4000°K. Add suffix **-4K**

Amber. 590nm (FWC compliant). Add suffix **-AMB**

Painted finish: Custom color (consult factory). Add suffix **-CC/** _____ (color)

Satin stainless steel is standard.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com