

JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Interior/Exterior Applications

Exits

G1999 JUMBO
Aluminum Exit Signs

SPECIFICATIONS

Construction

- Fixture housing is extruded aluminum with a die-formed aluminum face
- Letters and arrows are stencil cast in faceplate
- Housing, faceplate, and bracket are black polyester coated
- Diffuser is .125" green or red acrylic
- ETL/cETL listed
- Suitable for wet locations.

Electrical


- Fixture is wired with 4000K LEDs
- Driver is universal voltage
- Available with emergency backup battery operation
- Provided with 7/8" diameter hole centered in back for mounting over junction box.

Mounting

Fixture has four 3/16" mounting holes in back for direct mounting to wall.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

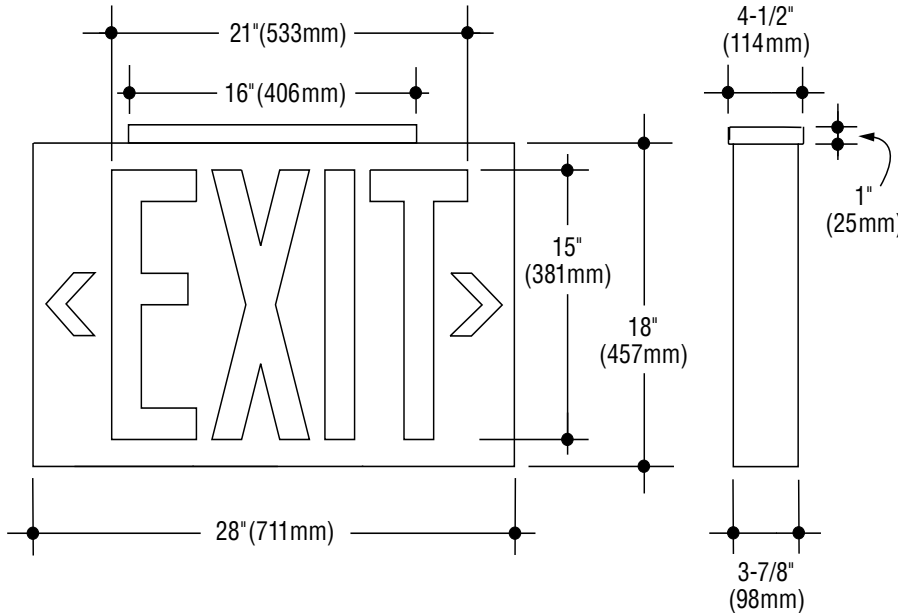

Catalog Numbers	Single Face		Double Face
	Back	Ceiling	Ceiling
LED .4W (Red), .3W (Green)	<input type="checkbox"/> LG1999-WM	<input type="checkbox"/> G1999-SF	<input type="checkbox"/> G1999-DF

Required suffixes Letter color Red **-RED** Green **-GRN**

Options

Directional arrows:

- Arrow left **-AL**
- Arrow right **-AR**
- Doublehead **-A2**
- Left and right (for double face) **-A**

Tamperproof screws: Socket head faceplate screws. Add suffix **-TP**.

Weatherproof: Add suffix **-W**.

Emergency battery: Integral circuitry provides 90 minutes of operation. Add suffix **-EM**.

Faceplate painted colors: (Black is standard) White. Add suffix **-WHT**.

Custom color, contact factory for custom preference. Add suffix **-CC**.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com