


JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Interior/Exterior Applications

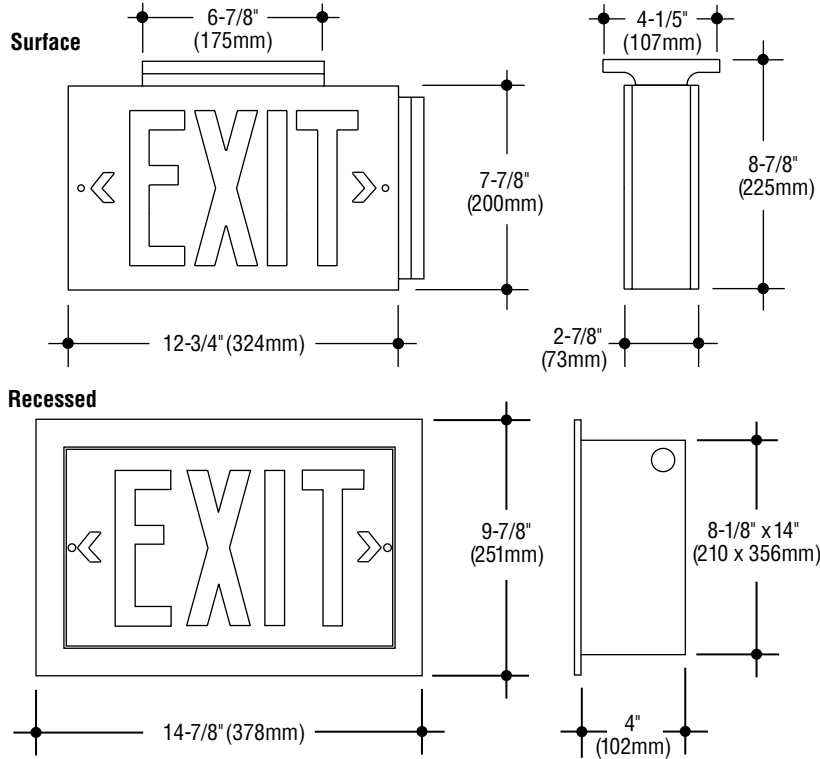

Doublehead arrows shown. Arrows only furnished as specified.

Exits

Slicker

Stainless Steel Exit Signs

SPECIFICATIONS

Construction

- Sign surface housing, faceplate, and bracket are constructed from 20 gauge 304 stainless steel with a brushed satin finish
- Recessed housing is 20 gauge steel
- Letters and arrows are stencil cut in faceplate, backed with .125" acrylic diffuser
- Ceiling/wall bracket is die-cast aluminum, painted black
- ETL listed, suitable for wet locations when specified
- Listed by ETL to UL 924 standard; meets NFPA Life Safety Code 101®.

Electrical

- Red or green LEDs are dual-circuit and universal voltage
- When emergency battery operation is specified, all components are contained in housing. Nickel cadmium battery, test light and button are included with the -EM option.

Mounting

- Surface signs mount to junction box.
- Recessed housing has holes for mounting.

Catalog Numbers Lamps	Single Face			Double Face		
	Back	Ceiling	End	Recessed	Ceiling	End
LED .4W (Red), .3W (Green)	<input type="checkbox"/> LN205	<input type="checkbox"/> LN206	<input type="checkbox"/> LN208	<input type="checkbox"/> LN207	<input type="checkbox"/> LDN206	<input type="checkbox"/> LDN208

Required suffixes

- Letter color -RED -GRN
 Voltage -120 -277

Options

Directional arrows:

- Arrow left -AL.
 Arrow right -AR.
 Doublehead -A2.
 Left and right (for double face) -A.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Emergency battery operation: Integral circuitry provides 90 minutes of operation. Add suffix -EM.

Pendant mount: Provides canopy and one 18" stem. Use ceiling model number and add suffix -S1.

Pedestal mount: (Add to ceiling mount only). Provides threaded flange on bottom for 1 1/4" pipe.

Add suffix -PED.

Weatherproof: Add suffix -W.

Voltage: 277V driver, universal voltage.

Add suffix -277.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
 2560 Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com