

Steplites

Series	LED	LED colors	No key option	Dimming	Exterior	Interior	Feed-Thru	Other Options
TLL300	●	●	●	●	●	●	●	Choice of diffusers Faceplate colors Bronze faceplate

TLL300 SERIES

Description

The TLL300 is a dual-function hybrid Steplite and "in use" Plugging Box. Appropriate for applications where the ability to access electrical convenience outlets, combined with high-performance site lighting, is desired. Devices can be plugged into the box with the hinged access door closed and locked in an exterior location. Typical uses are schools, parks, public buildings and similar areas where rugged construction, engineering excellence and quality are desired.

Construction

- Fixture housing is constructed from die-formed 16 gauge stainless steel
- Faceplates are cast aluminum with metallic aluminum polyester coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass set in silicone sealant
- cETLus listed, suitable for wet locations when specified weatherproof, in any wall construction
- All models suitable for concrete pour.

Electrical


- Standard and high output LEDs are available in a variety of colors
- Integral driver is standard universal voltage; optional 0-10v dimming driver available
- A wide variety of power and AV receptacles are available
- Recessed housing provided with eight 1/2" • Eight conduit knockouts, four in the lighting compartment and four in the receptacle compartment.

Mounting

Housing has flange with holes for mounting.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

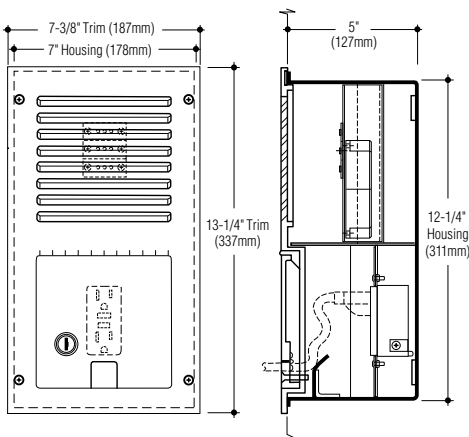

Catalog Number

Lamp

LED 3.15W, (450 lm @ 3000°K)
LED 9.45W, (1350 lm @ 3000°K)

TLL300W
TLL300W-HO

Lumens shown are source.

Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Options

LED colors:

4000°K (470 lm), -HO (1410 lm). Add suffix **-4K**.

Blue Add suffix **-BLU**.

Amber:

Amber. Add suffix **-AMB**;

Amber 590 nm (FWC compliant).

Add suffix **-AMB/590**.

Opal glass diffuser: Tempered. Add suffix **-OPL**.

No key: Wing-handle latch. Add suffix **-NK**.

Dimming: Universal voltage 0-10V driver.

Add suffix **-DIM**.

Tamperproof screws: Socket head faceplate

screws. Add suffix **-TP**.

Cast bronze faceplate: Satin finish, clear coated.

Add suffix **-B**.

Alternate faceplate color:

Custom color, please consult with factory.

Add suffix **-CC**.

Additional conduit holes : Special or additional holes in housing. Add suffix **-KO**.

Device options: See submittal page.

<https://cole-lighting.squarespace.com/s/SubmittalTLL300.pdf>



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com